

Durashield HD DSH-120 - Air Barrier Specifications


Enershield Air Barriers create an effective seal on the doorway. This is achieved by re-circulating the facility air in a laminar (smooth) flow across an open doorway. In addition, the kinetic energy within the moving air generates a barrier preventing leakage of air between two areas with different pressure and climate.





Features: The unit is powder coated 3mm steel box section frame construction, with 0.9mm sheet metal jacket, lined with closed cell acoustic insulation with antimicrobial and fire-resistant coating. Unit is available with optional RAL painting and stainless steel. The unit is manufactured as a single module with equal placement of blowers. Air barrier is provided with powder coated wall brackets and telescopic sliders.

Operating Characteristics: Top air intake is standard, front intake available on request. External 10-speed controller incorporating photoelectric cell door sensor for automatic activation upon door opening. Controller ready for BMS control. Fully articulated diffuser achieving air projection angle of $\pm 20^\circ$ from normal.



Shipped with full IPPC standard wooden crating. Standard manufacturer's warranty two year, extendable to five years with service contract.

DSH-120	
Width x Height	432 x 508 mm
Weight	300 kg
Blowers	5
Number of Motors	1
Voltage	400/690V, 3 Phase, 50Hz
Total Current FLA	10.5/6.9 A
Total Power	5.5 kW
Noise @ 2m	74 dB
Air Velocity at Outlet	27.9 m/s
Total Air Volume	7.61 m ³ /s
Outlet Velocity Uniformity	95%
Diffuser Angle Limits	$\pm 20^\circ$
Installation Height	3.7 m Maximum

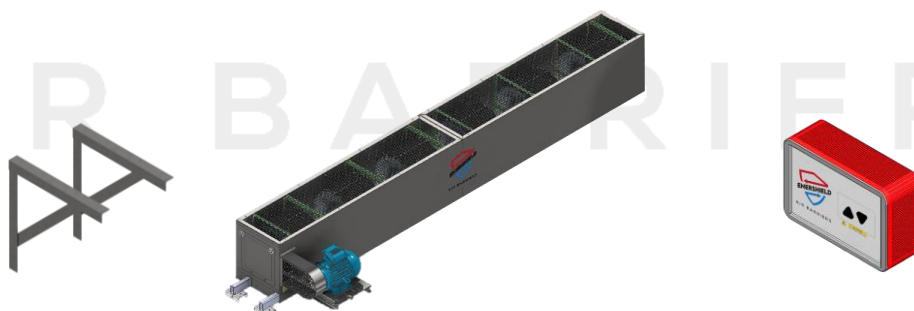

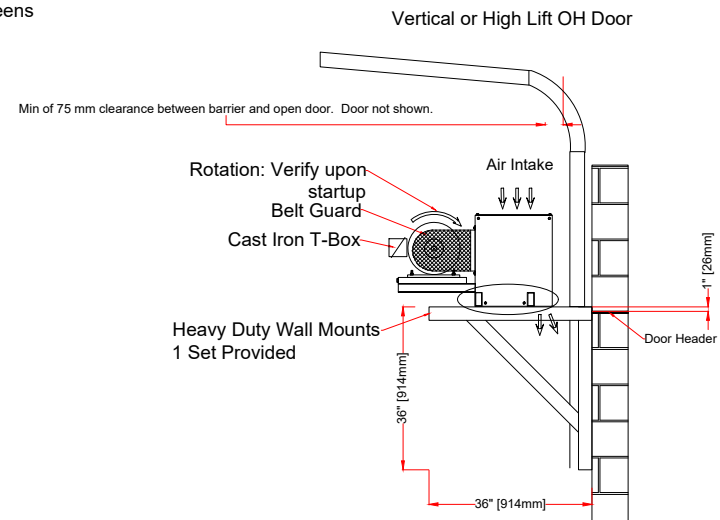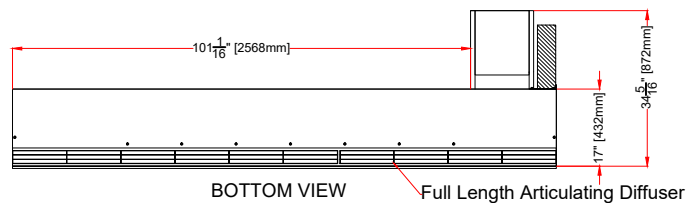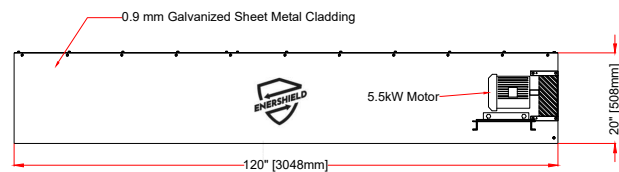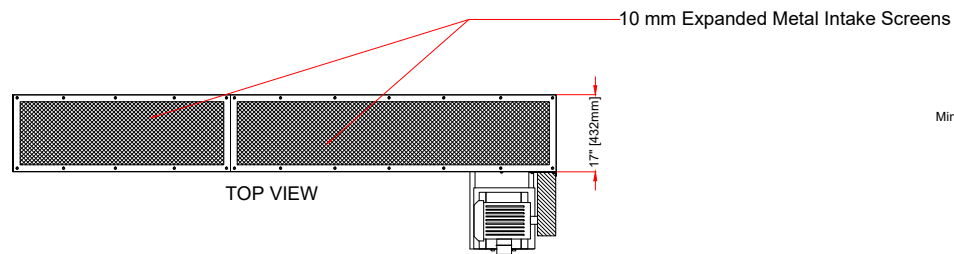

4 EXTENDABLE SLIDERS PROVIDED

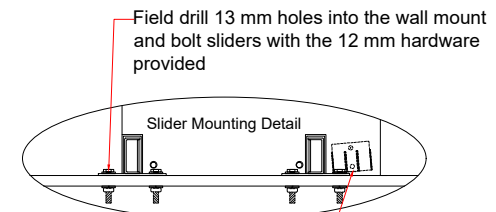

Adjust the diffuser 10-15 degrees towards the exterior of the building. Confirm diffuser adjustment after power has been supplied to the Air Barrier. See owners manual.

UKCA + CE CERTIFIED

ENERSHIELD
Calderhead Road
Shotts, Lanarkshire, Scotland
Tel. +44(0)1501 826501
E-mail: enquiries@enershield.com
Website: www.enershield.com



ENERSHIELD AIR BARRIER

Voltage	400 / 690V 3 Phase 50Hz
Motor (s)	1 @ 5.5kW
Amps FLA	10.5 / 6.9
Blowers	5

DURASHIELD-HD DSH-120

Air Velocity (fpm) (m/s)	5500 / 27.9
Air Volume (cfm) (m³/s)	16125 / 7.61
Total Power (hp) (Kw)	7.5 / 5.5
Weight (lbs) (Kg)	660 / 300